

## LEDDriving PREMIUM Festoon

Ideal replacement for any vehicle




**Wide range of different light colors**

Available in Warm White and Cool White for a variety of customization options




**Excellent brightness**

Thanks to advanced thermal management and superior light distribution



**Matches 31 mm, 36 mm & 41 mm festoon types**

Upgrade to LED with simple plug & play replacement

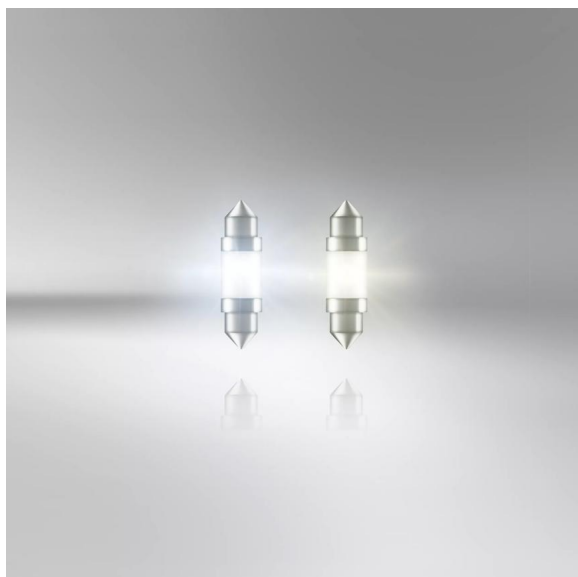

### Suitable LED replacement for Festoon Types

These LEDDriving PREMIUM products offer a suitable replacement for festoon lamps. The lamps are compatible with conventional festoon lamp bases and are easy to install through plug & play. Thanks to modern diffusor material the lamps provide a perfect light distribution. OSRAM offers a 6 year guarantee for these festoon retrofit lamps. These products are not ECE-approved and must not be used on public roads in any exterior application. Use on public roads will invalidate both the operating license and insurance coverage. Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

Product family datasheet

Technical data






Product description	Electrical Data				Photometric Data	
	Power input	Nominal voltage [calc.]	Nominal wattage [calc.]	Test voltage	Nominal luminous flux [calc.]	
LEDiving PREMIUM Festoon $\triangleq$ C5W	1.75 W	12 V	1 W	13.5 V	35 lm	
LEDiving PREMIUM Festoon $\triangleq$ C5W	1.75 W	12 V	1 W	13.2 V	35 lm	
LEDiving PREMIUM Festoon $\triangleq$ C5W	1.75 W	12 V	1 W	13.5 V	35 lm	
LEDiving PREMIUM Festoon $\triangleq$ C5W	1.75 W	12 V	0 W	13.5 V	35 lm	

Product description	Luminous flux tolerance	Physical Attributes & Dimensions	Lifetime Data		Environmental & Regulatory Information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
		Diameter [calc.]	Lifespan B3	Lifespan Tc	Primary Article Identifier
LEDiving PREMIUM Festoon $\triangleq$ C5W	$\pm 30\%$	11.0 mm	2500 hr	5000 hr	4062172173933   4062172267304   4052899068469   4052899435377   4052899435353   4052899486850   4052899068551   4062172328111   4052899435391   4062172054065
LEDiving PREMIUM Festoon $\triangleq$ C5W	$\pm 30\%$	11.0 mm	2500 hr	5000 hr	4008321876140   4008321684141   4008321658159
LEDiving PREMIUM Festoon $\triangleq$ C5W	$\pm 30\%$	11.0 mm	2500 hr	5000 hr	4052899068612   4052899068506
LEDiving PREMIUM Festoon $\triangleq$ C5W	$\pm 30\%$	11.0 mm	2500 hr	5000 hr	4052899276000   4062172173858   4052899436077   4052899436053   4052899068483   4052899068582   4052899436091

Product family datasheet

Product description	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
LEDiving PREMIUM Festoon ≙ C5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	31d7a82b-9761-47ca-9bf9-8a1b06269b30   489c1c3d-f4c1-4ffd-bd83-7592feca468c   170341f6-451b-44d7-9c96-59d90d26f3c3   863bd28f-1c19-449c-b58f-ab245ca4c1ea   8d7c66e0-2314-4620-8048-229940a06ca7   5b652795-46c4-48a3-94c6-7ec8345541e9   969147cb-6cd7-44a7-956a-615f4ffaf571   84959c7d-1865-4163-b37a-e0e3a1df04c5
LEDiving PREMIUM Festoon ≙ C5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	bb2718cd-aa21-4320-892b-2a15b0681fe6   48c99376-e992-46b7-b608-db51e5462774   20f0758e-d0f9-4fc9-bf71-94af616baec0
LEDiving PREMIUM Festoon ≙ C5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5a525071-52c5-419d-8110-3d385a2c332c   9ea5aef6-ae09-445d-a03c-359750906da5
LEDiving PREMIUM Festoon ≙ C5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	43511214-9e1f-420c-942a-e6c632f48904   a03e1707-99ab-4a22-8acf-8ba7e955a3e7   32bb19fb-18ff-493d-a361-f5b3d548f7ca   359b941c-54c8-49d4-a006-decde7162bee   9fe1fe62-fcfa-481b-b17b-04fce3c098be   be2a7d6a-aa46-416f-8b8e-54bc5a9dc6   a7bae958-155d-4e0d-9396-c98552ae2223

Download Data

File	
	User instruction GPRS_Safety symbols instructions
	Brochures LEDriving Retrofits - Exchange overview (EN)
	ref_pim_amsproduct360degreeimages LEDriving PREMIUM SL C5W 6497CW
	ref_pim_amsproduct360degreeimages LEDriving PREMIUM SL C5W 6499WW WARM WHITE
	ref_pim_amsproduct360degreeimages LEDriving PREMIUM SL C5W 6499CW

Соответствие стандартам

These products are not ECE-approved and must not be used on public roads in any exterior application.

Use on public roads will invalidate both the operating license and insurance coverage.

Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country. Detailed guarantee terms can be found at [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee). LEDriving CANBUS CONTROL UNIT avoids error messages on the board computer when using LED based products. Compared with conventional lamps

Ссылки

Guarantee terms are available at [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

