

LEDiving PREMIUM SL P21W

Ideal replacement for any vehicle



Wide range of different light colors

Available in Cool White, Amber and Red for a variety of customization options




Excellent homogeneity

Non-selective illumination thanks to modern diffuser material



Matches P21W lamps

Upgrade to LED with simple plug & play replacement

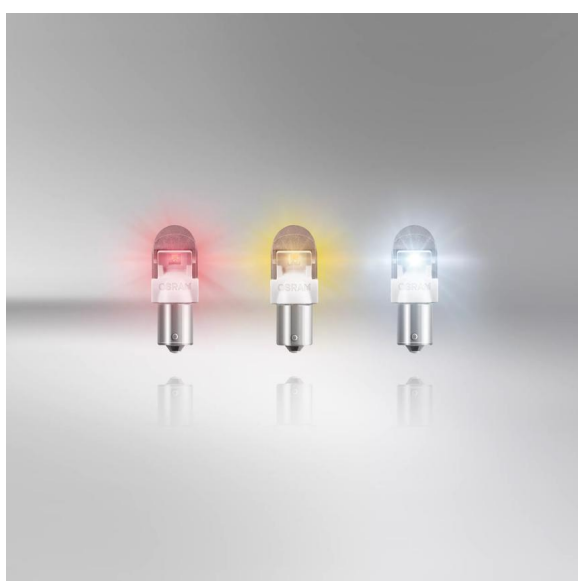

Suitable LED replacement for P21W

Discover our various LEDiving PREMIUM signal lamps. These retrofit lamps offer a suitable replacement for P21W lamp bases with an intense light up to 6,000 Kelvin. Thanks to their long lifetime and the short-circuit protection the lamps are maintenance-free. What's more, the LED lamps impress with their high efficiency: They use up to 80% less energy than standard P21W lamps. OSRAM offers a remarkable 6 year guarantee for these long-lasting lamps. These products are not ECE-approved and must not be used on public roads in any exterior application. Use on public roads will invalidate both the operating license and insurance coverage. Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country..

Product family datasheet

Technical data

Product description	Electrical Data				Photometric Data
	Power input	Nominal voltage [calc.]	Nominal wattage [calc.]	Test voltage	Nominal luminous flux [calc.]
LEDriving PREMIUM SL \triangleq P21W	1.67 W	12 V	2 W	13.5 V	144 lm
LEDriving PREMIUM SL \triangleq P21W	2.20 W	12 V	2 W	13.5 V	38 lm
LEDriving PREMIUM SL \triangleq P21W	1.54 W	12 V	2 W	13.5 V	82 lm







Product description	Luminous flux tolerance	Physical Attributes & Dimensions	Lifetime Data		Environmental & Regulatory Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
		Diameter [calc.]	Lifespan B3	Lifespan Tc	Primary Article Identifier
LEDriving PREMIUM SL \triangleq P21W	$\pm 20\%$	25.7 mm	2500 hr	5000 hr	4052899441507 4052899441484 4052899321861
LEDriving PREMIUM SL \triangleq P21W	$\pm 20\%$	25.7 mm	2500 hr	5000 hr	4052899321946 4052899441668 4052899441743
LEDriving PREMIUM SL \triangleq P21W	$\pm 20\%$	25.7 mm	2500 hr	5000 hr	4052899321922 4052899441569 4052899441545

Product description	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
LEDriving PREMIUM SL \triangleq P21W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	2a24aa10-d179-4dfa-a9b5-be255d0b8c01 1b8bb79e-fef0-492f-b0ef-485ecb28f6f7 be03f638-addd-4f81-8023-f361d643482f
LEDriving PREMIUM SL \triangleq P21W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	f267a1a2-8891-4dae-9826-9ebc9457f225 63324074-f2bb-4036-bc0d-0f8938e9ab31 da3f2f13-8472-4b82-9d0c-5a9065bb7764

Product family datasheet

Product description	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
LEDiving PREMIUM SL ≙ P21W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	4e73c5a1-3cac-446b-8260-596cd708924b d7d2dda8-4966-43d4-86db-9c1df77ef9a4 ae0e7a44-22e6-47c5-8e74-7c1170faf168

Download Data

File	
	User instruction GPRS_Safety symbols instructions
	Brochures LEDriving Retrofits - Exchange overview (EN)
	Brochures Sales Folder LEDriving replacement lamps (EN)
	ref_pim_amsproduct360degreeimages LEDriving PREMIUM Retrofit
	ref_pim_amsproduct360degreeimages LEDriving SL PY21W 7507DYP-02B
	ref_pim_amsproduct360degreeimages LEDriving PREMIUM Retrofit 7556R

Соответствие стандартам

These products are not ECE-approved and must not be used on public roads in any exterior application.

Use on public roads will invalidate both the operating license and insurance coverage.

Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

Ссылки

Guarantee terms are available at www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

