

LEDDriving PREMIUM SL W21/5W

Ideal replacement for any vehicle



Wide range of different light colors

Available in Cool White, Amber and Red for a variety of customization options




Excellent brightness

Thanks to advanced thermal management and superior light distribution



Matches W21/5W lamps

Upgrade to LED with simple plug & play replacement

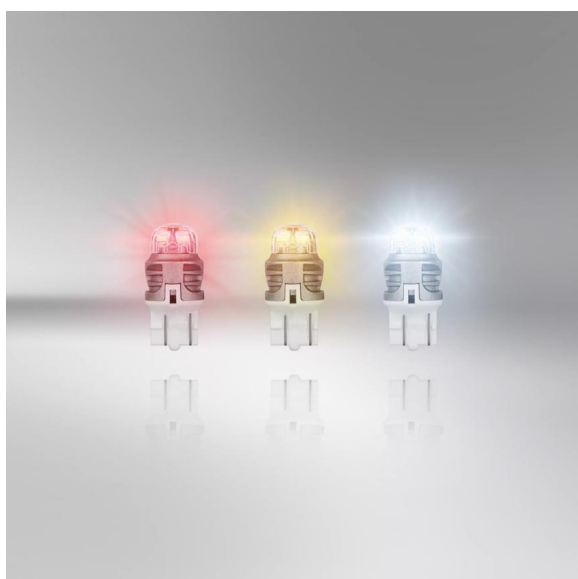

Suitable LED replacement for W21/5W

The LEDDriving PREMIUM W21/5W retrofit lamps offer a suitable replacement for conventional W21/5W lamp bases. With these lamps, you have an easy plug & play replacement, regardless of base polarity. Thanks to homogenous light distribution a non-selective illumination is possible. For these LEDDriving PREMIUM lamps, OSRAM offers a 6 year guarantee. These products are not ECE-approved and must not be used on public roads in any exterior application. Use on public roads will invalidate both the operating license and insurance coverage. Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

Product family datasheet

Technical data

Product description	Electrical Data				Photometric Data
	Power input	Nominal voltage [calc.]	Nominal wattage [calc.]	Test voltage	Nominal luminous flux [calc.]
LEDiving PREMIUM SL $\triangleq$ W21/5W	1.65 / 0.55 W	12 V	3 W	13.5 V	190/26 lm
LEDiving PREMIUM SL $\triangleq$ W21/5W	1.54 / 0.44 W	12 V	1 W	13.5 V	35/5 lm
LEDiving PREMIUM SL $\triangleq$ W21/5W	1.54 / 0.44 W	12 V	1 W	13.5 V	77/7 lm
LEDiving PREMIUM SL $\triangleq$ W21/5W	1.65 / 0.55 W	12 V	1 W	13.5 V	190/26 lm
LEDiving PREMIUM SL $\triangleq$ W21/5W	1.54 / 0.44 W	12 V	1 W	13.5 V	77/7 lm
LEDiving PREMIUM SL $\triangleq$ W21/5W	1.54 / 0.44 W	12 V	1 W	13.5 V	35/5 lm

Product description	Luminous flux tolerance	Physical Attributes & Dimensions	Lifetime Data		Environmental & Regulatory Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
		Diameter [calc.]	Lifespan B3	Lifespan Tc	Primary Article Identifier
LEDiving PREMIUM SL $\triangleq$ W21/5W	$\pm 25\%$	20.0 mm	2500 hr	5000 hr	4052899359550 4052899442535 4052899330788 4052899442511
LEDiving PREMIUM SL $\triangleq$ W21/5W	$\pm 25\%$	20.0 mm	2500 hr	5000 hr	4052899330825 4052899442597 4052899442610
LEDiving PREMIUM SL $\triangleq$ W21/5W	$\pm 25\%$	20.0 mm	2500 hr	5000 hr	4052899442573 4052899330849 4052899359598 4052899442559
LEDiving PREMIUM SL $\triangleq$ W21/5W	$\pm 25\%$	19.4 mm	2500 hr	5000 hr	4052899427686 4052899513884 4052899513860 4052899427358 4052899513907
LEDiving PREMIUM SL $\triangleq$ W21/5W	$\pm 25\%$	19.4 mm	2500 hr	5000 hr	4052899513969 4052899513945 4052899427730
LEDiving PREMIUM SL $\triangleq$ W21/5W	$\pm 25\%$	19.4 mm	2500 hr	5000 hr	4052899514065 4052899514041 4052899427785 4052899514027 4052899427457

Product family datasheet

Product description	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
LEDDriving PREMIUM SL ≙ W21/5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	d721e103-1f61-44f6-9bcd-92416a0189b4 e4547806-41fe-417f-b839-5e311e3e8e33 fd6ecf81-327b-4804-bfbb-e72e8a2348b9 2b371a39-7691-4bd0-bf6c-5781eeac10de
LEDDriving PREMIUM SL ≙ W21/5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	a7f960b2-03e3-44b7-ac32-e8d5deb1e26f e9ee8b1f-e9c8-4956-881b-e1e0ac3fab91 23c3b47b-2d1e-4b23-8713-1bb251211440 530688bd-369d-402b-a921-f5bff11bab6e
LEDDriving PREMIUM SL ≙ W21/5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	85d073d1-a247-4921-be5f-b24372ea41be 4c31ba8a-9002-4dd8-93c3-a440d6a46b30 2cdab345-f072-4aa3-b40a-353dcad2b086 9cbe2dd2-3ba3-46da-ac32-f5df35f34af1
LEDDriving PREMIUM SL ≙ W21/5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	a8874f2d-0b08-4d95-9e4b-947dd4f3cd46 d0d85904-f138-426f-8349-6702394fe6c9 a24a50f7-ed29-4443-8742-c933e08a0646 537cc086-6a4a-4022-919c-bff80ebbc456 341b7c62-dd8d-43d0-b194-64272c137b3d a1c6f226-5d34-4f3d-9463-241ba7414e4d c0a70975-f5c3-40b1-a335-c4a79082674d

Product family datasheet

Product description	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
LEDiving PREMIUM SL ≙ W21/5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	44182716-e28d-404a-8a37-eb9b5f96a0d9 fa2f22a4-03c9-4cb8-8913-057737a22e06 ffbcf6a2-3e1b-4650-aacf-5438da80985c bf453968-3e63-40d6-8eea-11904f3c757a f769ad7d-aa0b-47d3-a33c-9574001c2493
LEDiving PREMIUM SL ≙ W21/5W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	6a726ed9-9687-470a-82f7-227a060d1fdc 4a5df613-434a-4819-894a-02f3f2a038ac 6eccc7a4-7b1a-4193-b2d4-8ea19e296160 8aa9abb3-fb56-41c1-aaf8-3e4c8e101b3d e3b69b3b-6bb8-40b8-a444-d0d1287b2fa2 c0e5b53c-b8ab-437c-a701-8adff573f308 e84dd8e5-e6b3-499c-8c66-98f8bf20470a

Download Data

File	
	User instruction GPRS_Safety symbols instructions
	Brochures LEDiving Retrofits - Exchange overview (EN)
	Brochures Sales Folder LEDiving replacement lamps (EN)
	ref_pim_amsproduct360degreeimages LEDiving PREMIUM Retrofit 7915CW
	ref_pim_amsproduct360degreeimages LEDiving PREMIUM Retrofit 7915YE
	ref_pim_amsproduct360degreeimages LEDiving PREMIUM SL W21/5W 7915R RED

Соответствие стандартам

These products are not ECE-approved and must not be used on public roads in any exterior application.

Use on public roads will invalidate both the operating license and insurance coverage.

Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

Ссылки

Guarantee terms are available at www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

