

HTI Double End (other)



CBP_03.00 Areas of applicat, all [calc.]


- Concert Lighting
- Club & Disco
- Stage & Theatre
- Studio, TV, & Film
- Architecture & Architainment

CBP_09.00 Product features and benefits, all [calc.]

- High luminance
- High luminous efficacy and efficiency
- Robust design with eXtreme Seal (XS) technology, allowing up to 450°C at the pinch seal
- Consistent lumen output over the life of the lamp
- Robust design with eXtreme Seal (XS) technology on some types, allowing up to 450°C at the pinch seal
- Consistent lumen output over the life of the lamp
- Higher luminous efficacy than conventional HID lamps provides higher fixture efficiency



 CONTAINS
MERCURY

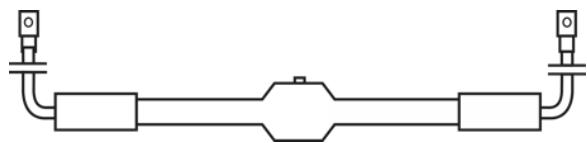

HTI AND HMD METAL HALIDE LAMPS

Product family datasheet

Technical data

Product description	Electrical Data			Photometric Data
	Nominal wattage	Nominal voltage	Nominal current	
HTI 4000 W/DE	4000 W	105 V	38 A	360000 lm
Lifetime Data				
Product description	Average Rated Life [GMS]			
HTI 4000 W/DE	500 hr			

Product family datasheet

CBP_05.00 Safety advice, all [calc.]

Because of their high luminance, UV radiation and high internal pressure during operation, HTI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.