

## Halogen (75-130 V) with Reflector



### CBP\_03.00 Areas of applicat, all [calc.]


- Stage & Theatre
- Studio, TV, & Film
- Professional Photography
- Club & Disco

### CBP\_09.00 Product features and benefits, all [calc.]


- Robust construction for lasting performance
- Consistent color over the life of the lamps
- Instant on and nearly constant luminous flux over the life of the lamp
- Broad product portfolio supporting the stage and studio markets
- Dimmable with traditional amber shift



## Product family datasheet

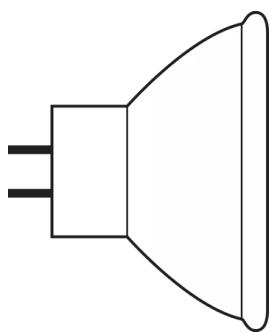

Halogen Lamp with reflector MR16

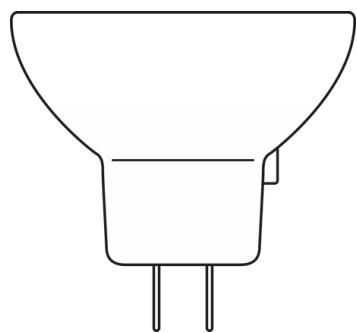

HALOGEN LAMP WITH REFLECTOR 64255

## Product family datasheet

### Technical data

Product description	General Product Information		Electrical Data	
	ANSI code	LIF	Nominal wattage	Nominal voltage
93506 250 W 120 V	ENH	-	250 W	120 V
93520 300 W 82 V <sup>1)</sup>	FHS	-	300 W	82 V
93518 300 W 120 V	ELH	-	300 W	120 V

Product description	Physical Attributes & Dimensions	Lifetime Data
	Lamp base	Average Rated Life [GMS]
93506 250 W 120 V	GY5.3	175 hr
93520 300 W 82 V <sup>1)</sup>	GX5.3	70 hr
93518 300 W 120 V	GY5.3	35 hr

<sup>1)</sup> Available on request

## Product family datasheet

---

### CBP\_05.00 Safety advice, all [calc.]

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (protective shields, grids, etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. There must also be a warning sign to indicate that the lamps give off high levels of heat. Detailed information is available on request.

---

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.