


LEDDriving PREMIUM SL P21/5W

Ideal replacement for any vehicle



Wide range of different light colors

Available in Cool White, Amber and Red for a variety of customization options




Excellent homogeneity

Non-selective illumination thanks to modern diffuser material



Matches P21/5W lamps

Upgrade to LED with simple plug & play replacement

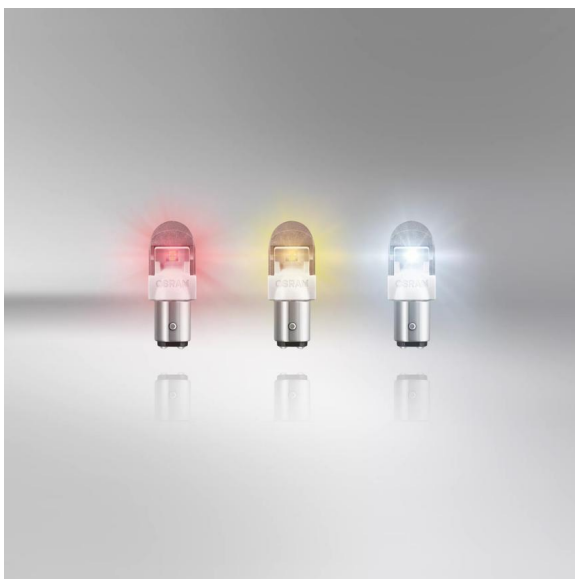

Suitable LED replacement for P21/5W

LEDDriving PREMIUM PY21/5W replacement lamps are compatible with conventional P21/5W lamp bases. The retrofit lamps are available in three different light colors for various applications (Cool White, Amber and Red) and offer an easy plug & play replacement, regardless of base polarity. OSRAM offers a 5 year guarantee for these LEDDriving PREMIUM lamps. These products are not ECE-approved and must not be used on public roads in any exterior application. Use on public roads will invalidate both the operating license and insurance coverage. Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

Technical data

Product description	Electrical Data					Photometric Data
	Power input	Nominal voltage [calc.]	Nominal wattage [calc.]	Power input tolerance	Test voltage	Nominal luminous flux [calc.]
LEDDriving PREMIUM SL \triangleq P21/5W	1.56 / 0.594 W	12 V	2 W	$\pm 10\%$	13.5 V	144/26 lm
LEDDriving PREMIUM SL \triangleq P21/5W	1.65 / 0.44 W	12 V	2 W	$\pm 10\%$	13.5 V	38/5 lm
LEDDriving PREMIUM SL \triangleq P21/5W	1.54 / 0.44 W	12 V	2 W	$\pm 10\%$	13.5 V	82/6.6 lm

Product description	Physical Attributes & Dimensions			Lifetime Data
	Lamp base	Length [calc.]	Diameter [calc.]	Lifespan B3
LEDDriving PREMIUM SL \triangleq P21/5W	BAY15d	49.8 mm	25.7 mm	2500 hr
LEDDriving PREMIUM SL \triangleq P21/5W	BAY15d	49.8 mm	25.7 mm	2500 hr
LEDDriving PREMIUM SL \triangleq P21/5W	BAY15d	49.8 mm	25.7 mm	2500 hr







Product description	Lifespan Tc	Environmental & Regulatory Information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
		Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1
LEDDriving PREMIUM SL \triangleq P21/5W	5000 hr	4052899321960 4052899433878 4052899433854	Lead	7439-92-1
LEDDriving PREMIUM SL \triangleq P21/5W	5000 hr	4052899433991 4052899433977 4052899322004	Lead	7439-92-1
LEDDriving PREMIUM SL \triangleq P21/5W	5000 hr	4052899433939 4052899433915 4052899321984	Lead	7439-92-1

Product description	Safe Use Instruction	Declaration No. in SCIP database
LEDDriving PREMIUM SL \triangleq P21/5W	The identification of the Candidate List substance is sufficient to allow safe use of the article.	9b21bd6f-9e67-4928-bac8-d9da2d94ad5a 4c75e56c-d159-44cf-92b1-5b3ef2e416ba 7f5e495d-a055-4a12-ae43-ba11ea822892

Product family datasheet

Product description	Safe Use Instruction	Declaration No. in SCIP database
LEDiving PREMIUM SL ≙ P21/5W	The identification of the Candidate List substance is sufficient to allow safe use of the article.	13874937-4192-4f27-8c80-879ae9c431e2 7d3b177a-fc02-433e-8f03-b9c5b779cee0 1c4a29c8-89c2-414c-955f-d590a749752f
LEDiving PREMIUM SL ≙ P21/5W	The identification of the Candidate List substance is sufficient to allow safe use of the article.	55d082b4-b792-4057-a8ae-907af0305b5c 7736a687-a01d-4347-92db-903136371f8e 696dbb1c-125d-4633-a476-7c846a749a5c

Download Data

File	
	User instruction GPRS_Safety symbols instructions
	Brochures LEDriving Retrofits - Exchange overview (EN)
	Brochures Sales Folder LEDriving replacement lamps (EN)
	ref_pim_amsproduct360degreeimages LEDriving PREMIUM Retrofit 1557CW
	ref_pim_amsproduct360degreeimages NIGHT BREAKER H7-LED 64210DWNB
	ref_pim_amsproduct360degreeimages LEDriving PREMIUM Retrofit 1557YE-02B

Соответствие стандартам

These products are not ECE-approved and must not be used on public roads in any exterior application.

Use on public roads will invalidate both the operating license and insurance coverage.

Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

Ссылки

Guarantee terms are available at www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

