


## BATTERYcharge 7PIN | 1PHASE | 32 AMP

Charging Cable for electric and plug-in hybrid vehicles



### Type 2 to Type 2

Charge at home and on the move  
Type 2 to Type 2 5PIN | 1PHASE




### 32 Ampere

Connects to any charging unit or station with a 32A (1 Phase) type 2 connection



### 7.2 kWh

Charge your 60kW battery in ca. 8 hours



### 5m cable length

Ergonomic handles for optimal handling and a cable length of 5 meters



### Drive with OSRAM into a more emission-free future

Discover the world of electric driving with OSRAM. Charge your fully electric or plug in hybrid type 2 vehicle from any 32A (1 phase) charging unit or station fitted with a type 2 connection point. The charging cable is equipped with ergonomic handles for optimal handling and has a cable length of 5 meters. It is suitable for use at public charging stations and at home. In addition, the charging cables are equipped with dust protection caps and tested for water resistance according to IP65 and shock resistance according to IK10. Even when connected, the electrical contact points are protected against the ingress of dust and splash water in accordance with IP65 and IK10. The scope of delivery also includes a durable, compact storage bag to neatly store the cable after charging. In addition, the product is TÜV and CE certified and comes with a 2-year guarantee\*

# Product datasheet

## Technical data

### Product information

Storage Case	Yes
Number of Phases	1
Vehicle Charger Type	Type2
Charging Point Charger Type	Type2


### General Product Information

Global order reference	OCC23205
------------------------	----------

### Electrical Data

Nominal wattage	7200 W
Nominal voltage	240 V
Nominal current	32 A

### Physical Attributes & Dimensions

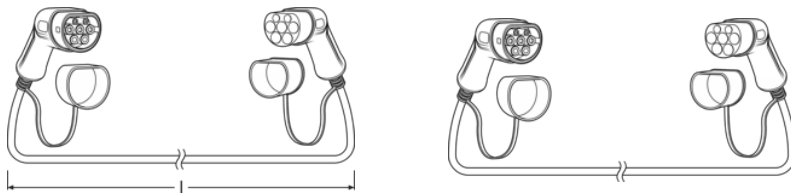

Length	5000 mm
Width	70.0 mm
Height	120.0 mm

### Lifetime Data

Guarantee	2 years
-----------	---------

### Additional product data

Operating Temperature	-40 +80 °C
-----------------------	------------

### Certificates & standards

Type of protection	IP65
--------------------	------

## Product datasheet

Standards	TÜV / CE
IK Class	IK10

### Environmental & Regulatory Information

<b>Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)</b>	
Primary Article Identifier	4052899624122
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899624122	BATTERY charge 7PIN   1PHASE   32 AMP	Sleeves 1	340 mm x 200 mm x 108 mm	7.34 dm <sup>3</sup>	2450.00 g
4052899624191	BATTERY charge 7PIN   1PHASE   32 AMP	Shipping carton box 4	496 mm x 406 mm x 387 mm	77.93 dm <sup>3</sup>	12470.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### Соответствие стандартам

Application advice:

For more detailed application information and graphics please see product datasheet and user instruction.\*for precise conditions please refer to:

[www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# OSRAM