

TYREinflate 6000

TYREinflate 6000 OTIR 6000



Быстрое время накачки шин
Inflate the tyre to the desired
pressure in approximately 2
minutes 1)2)



Deflator Valve

For deflating too much air



Digital Auto Stop

Automatic stop function
when the preset pressure is
reached



Cordless and rechargeable

Can be used with or without
direct power supply

Техническое описание продукта



Rechargeable Digital Tyre Inflator and Air Pump

The OSRAM TYREinflate 6000 is a cordless and rechargeable tyre inflator with Li-Ion battery, making it an ideal companion for camping and road trips. The OTIR 6000 digital tyre inflator can inflate a tyre in just two minutes¹⁾²⁾ and has a special setting for other inflatable items such as air beds, air mattresses, balls and more. The auto stop function and the deflator valve help to keep the tyres and other inflatables optimally inflated. . The backlit LED display and integrated LED light provide improved readability of the pressure settings and improved illumination of the working area even in reduced visibility conditions or at night. Thanks to the powerbank function, the OSRAM TYREinflate 6000 can also be used as a charger for electronic devices such as your mobile phone. The scope of delivery includes a mains charger and a 12-volt cable for direct power supply, if required. Also included is a 10-piece adapter set, a storage bag and spare valve caps. OSRAM offers a 2-year guarantee¹⁾ on this product.

1) For precise conditions please refer to: www.osram.com/am-guarantee

2) Based on inflating a 13" tyre from flat to 2.4 BAR

3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres

Technical data


Информация о продукте

Номер заказа	OTIR6000
Время накачки шины	2 min
Максимальное значение давления	5.5 bar
Длина воздушного шланга	70 cm
Дефлятор	Да
Длина кабеля питания	3.5 m
Время зарядки (ч)	10 h
Светодиодная подсветка	Да
Размер экрана	76 x 46 mm
Единицы измерения	PSI, kPa, bar
Предустановленные функции	Да
Автоматическая остановка	Да
Чехол для хранения	Да
Точность (бар)	±0.1 bar
Производительность (л/мин)	43-45 l/min

Электрические параметры

Номинальная мощность	180.00 Вт
Номинальное напряжение	12.0 В
Источник питания	12 V Fused Plug/230 V mains plug

Размеры и вес

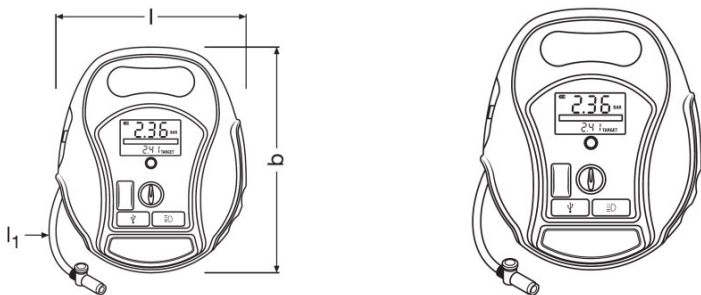

Длина	298.0 mm
Ширина	298.0 mm
Высота	80.0 mm

Техническое описание продукта

Дополнительные данные

Тип дисплея	Digital
Уровень шума (дБ)	90 dB
USB-разъем 2,1 A (для гаджетов)	Да
Рекомендуется использовать с	Motorbike, Bicycle, Small Van, Motorhome, Air beds, air mattress
Дополнительно	10-piece adaptor kit & 4 x spare valve caps, 1 x spare fuse & 1 pair of gloves

Возможности / мощности

Комплектующие / аксессуары	Adaptors for: Balls, Air Mattress, Bikes
Предохранитель	15 A

Классификация

Номер заказа	OTIR6000
--------------	----------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	07-03-2024
Primary Article Identifier	4062172294515
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	3abae9a3-29bd-403e-915c-caab5002583a



Detail



Detail



Detail

Техническое описание продукта



Detail



Detail



Detail



Detail



Detail



Detail



Detail

Данные для заказа

Техническое описание продукта

Product code	Описание продукта	Упаковка (цена/шт.)	Размеры (длина x ширина x высота)	Объем	Вес брутто
4062172294515	TYRE inflate 6000	Folding carton box 1	325 mm x 100 mm x 283 mm	9.20 дм³	1545.00 g
4062172294522	TYRE inflate 6000	Shipping carton box 4	420 mm x 344 mm x 311 mm	44.93 дм³	6480.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Загрузка данных

Файл	
	User instruction TYREinflate OTIR6000 Rechargeable Digital Tyre Inflator and Air Pump

Соответствие стандартам

- 1) For precise conditions please refer to: www.osram.com/am-guarantee
- 2) Based on inflating a 13" tyre from flat to 2.41 BAR
- 3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres

Application advice:For more detailed application information and graphics please see product datasheet and the user instruction.

Рекомендации по применению

Для получения дополнительной информации и изображения продукции, пожалуйста, ознакомьтесь с инструкцией.

Примечание

В заказ могут быть внесены изменения без предварительного уведомления. Проверьте информацию на наличие ошибок. Убедитесь, что информация актуальна.

