

# LEDguardian ROAD FLARE



## 2 in 1

Can be used as a warning light and as a torch




## 360 degree rotation

The 360-degree rotating orange warning light function is visible from a great distance



## Magnetic mounting

Thanks to the magnet function and the hook, the LED warning light can be attached in various ways.



## 3x AAA batteries included

Operational readiness. With the three AAA batteries supplied, the warning light is ready for use immediately after purchase



### Light is safety-See and be seen with OSRAM

Be prepared with OSRAM warning and safety lights. The LEDguardian ROAD FLARE is a compact LED warning light for various situations on the road and for minor inspection work on your vehicle. The 360 degrees rotating, orange, warning light function of the LEDguardian ROAD FLARE is visible from a great distance and can provide crucial information about a dangerous situation in an emergency. A total of 16 high-quality long-life LEDs offer three different operating modes: 360 ° rotating orange warning light function, permanent orange light function and a white torch function. In addition, the LEDguardian ROAD FLARE impresses with its non-slip, dirt-repellent surface, a practical hook for attachment and is so robust and resistant that it can even be run over by a car\*\* without losing performance. The LEDguardian ROAD FLARE has been tested and validated in our certified environmental simulation laboratory for extreme external influences in terms of water, dust and impact from falls. According to the IP54 & IK07 protection classes, the LEDguardian ROAD FLARE is resistant to water, dust and impacts. With the three AAA batteries supplied, the warning light is ready for use immediately after purchase. OSRAM provides a 2-year guarantee on this product\* The LEDguardian ROAD FLARE is not approved as a warning light in Germany in the sense of the German Road Traffic Licensing Regulations (StVZO). Please observe any special requirements and laws in countries outside Germany regarding the use and operation of an additional warning light in road traffic.\*For precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee) \*\*Tested at a mid-range car at walking pace

Technical data

Product information

|   |                           |
|---|---------------------------|
| Order reference                             | LEDSL303                  |
| Application (Category and Product specific) | Warning and safety lights |


Electrical data

|                 |        |
|-----------------|--------|
| Nominal wattage | 1.85 W |
| Nominal voltage | 4.5 V  |

Photometrical data

|                   |                                    |
|-------------------|------------------------------------|
| Color temperature | yellow:1800-2000/white: 6500 K     |
| Luminous flux     | 75 lm                              |
| Light color LED   | Flash: orange/amber / Torch: white |

Dimensions & weight

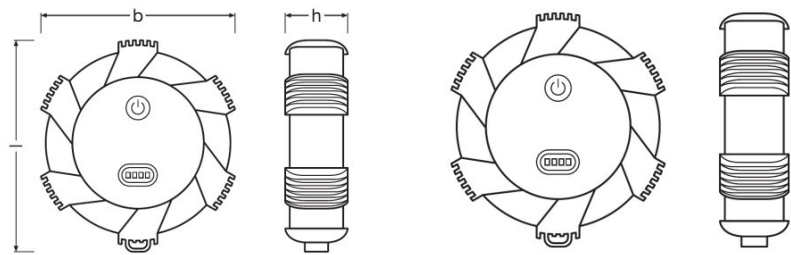

|                |          |
|----------------|----------|
| Product weight | 176.00 g |
| Length         | 101.0 mm |
| Width          | 33.0 mm  |
| Height         | 111.0 mm |

Colors & materials

|            |       |
|------------|-------|
| Base color | Black |
|------------|-------|

Lifespan

|           |         |
|-----------|---------|
| Guarantee | 2 years |
|-----------|---------|

Additional product data

|                 |          |
|-----------------|----------|
| Type of Battery | Alkaline |
|-----------------|----------|

Product datasheet

|                  |                                 |
|------------------|---------------------------------|
| Scope of battery | Yes                             |
| Battery          | 3xAAA (Battery Lifetime 8h-20h) |

Capabilities

|            |     |
|------------|-----|
| Technology | LED |
|------------|-----|

Certificates & standards

|                    |      |
|--------------------|------|
| Type of protection | IP54 |
| IK Class           | IK07 |

Country specific categorizations

|                 |          |
|-----------------|----------|
| Order reference | LEDSL303 |
|-----------------|----------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |               |
|---|---------------|
| Date of Declaration   | 07-03-2024    |
| Primary Article Identifier  | 4062172295642 |
| Declaration No. in SCIP database                                      | In work       |

Logistical Data

| Product code  | Product description       | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume                | Gross weight |
|---------------|---------------------------|---------------------------------|---|-----------------------|--------------|
| 4062172295642 | LEDguardian ROAD<br>FLARE | Folding carton box<br>1         | 109 mm x 36 mm x<br>142 mm              | 0.56 dm <sup>3</sup>  | 218.00 g     |
| 4062172295659 | LEDguardian ROAD<br>FLARE | Shipping carton box<br>24       | 245 mm x 235 mm x<br>253 mm             | 14.57 dm <sup>3</sup> | 5146.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Legal advice

\*For precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

\*\*Tested at a mid-range car at walking pace

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

