


ELEMENT G2 24V

Постоянное напряжение - Диммирование не предусмотрено

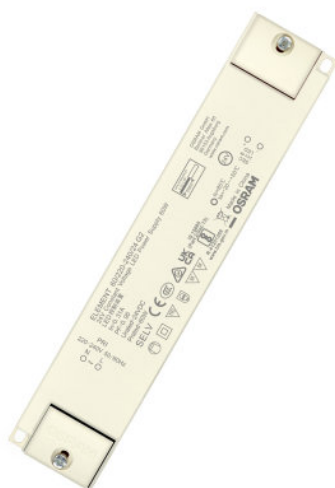

Области применения

- Освещение стеллажей
- Закарнизное освещение
- Освещение под шкафом

Преимущества продукта

- High efficiency up to 92%

Характеристики продукта

- Up to 30,000 h @ T_c max / up to 50,000 h @ T_c -10 °C

Данные о продуктовой линейке

Рекомендации по применению

Для получения дополнительной информации и изображения продукции, пожалуйста, ознакомьтесь с инструкцией.

Текст спецификации

- EMI pass verified with wire length of 3 m, from the ECG to the LED module at full load.
 - Wiring longer than 3 m from ECG to LED module is possible, but site installation conditions may interfere with EMI with these longer cables. EMI is therefore not verified in this condition.
 - For wires longer than 3 m, the appropriate cable cross section must be carefully selected to reduce voltage drop.
-

Продажи и техническая поддержка

Продажи и техническая поддержка www.osram.com

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Ссылки

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit [https://](https://www.inventronics-light.com/multilevel-guarantees)

- ▶ www.inventronics-light.com/multilevel-guarantees
-

Примечание

В заказ могут быть внесены изменения без предварительного уведомления. Проверьте информацию на наличие ошибок. Убедитесь, что информация актуальна.
