
OSRAM

LEDinspect FLEXIBLE HEAD TORCH



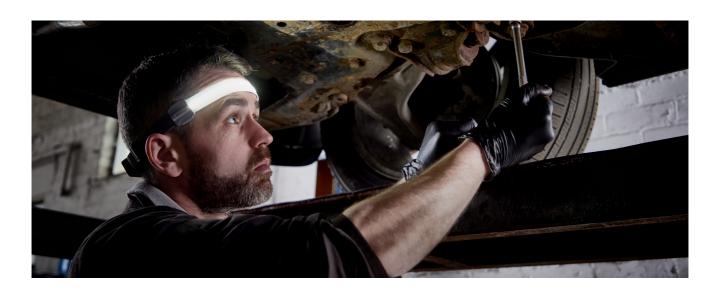

Flexible Head Band

Soft padding and additional adjustable strap for optimal wearing comfort



Up to 115 Lumen

Three light functions: Up to 115 lm (high, up to 50 lm (low) and a red flashing function at the rear



Approx. 1.5 hours charging

With a charging time of only approx. 1.5 hours, this OSRAM lamp is quickly ready for use again



2-year OSRAM Guarantee*

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.

Product family datasheet



Light is versatile

This high-quality flexible head torch from OSRAM is perfect for professional and private use. With three light functions high up to 115lm, low up to 50lm and a red flashing function at the rear, this head torch offers different setting options for a variety of tasks. The illumination integrated directly into the individual adjustable headband enables a wide and even distribution of light and can provide better illumination of the working area. The rechargeable battery allows up to 4.5h of operation at high power or up to 5.5h at low power and with a charging time of only approx. 1.5 hours, this OSRAM lamp is also quickly ready for use again. An USB Micro B charging cable to recharge the lithium battery is included in the scope of supply. In accordance with IP 42 protection rating, this head torch has protection against ingress of dust particles and against splashing water. The LEDinspect Flexible Head Torch has soft pads inside and additionally an adjustable strap for optimal wearing comfort. With a weight of only 62g and the flexible, foldable design, the product is easy to store and transport, making it ideal as a light for craft work, car repairs and everyday use. OSRAM also provides a 2-year guarantee**For precise conditions please refer to: www.osram.com/am-guarantee

Product family datasheet

Technical data

| | Product information | | | Electrical data | Photomo | | | |
|---------------------|--|--|-------------------------------|--------------------|-------------------------------|------------------------------|---------------------------|--|
| Product description | Order reference | Application (Category and Product specific) | | Nominal voltage | Luminou flux | us Color temper- ature | Light color LED | |
| INSPECTION LAMP | LEDIL414 | LED insp | ection lights | 3.7 V | 115 lm | 6000 K | White | |
| | LED module information | custo | | | | Colors & materials | | |
| Product description | Number of LEDs per module | Heigh | t Prod weig | | Vidth | Length | Base color | |
| INSPECTION LAMP | 1 | 25.0 n | nm 62.00 |) g 2 | 0 mm | 245.0 mm | Black / Orange | |
| | Lifespan Additional product data Capabilities | | | | | | | |
| Product description | Guarantee | rantee Number of included Type of Battery Technology batteries | | | | у | | |
| INSPECTION LAMP | 2 years | 1 | | Rechargea | able | LED | | |
| | Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACh) | | | | | | | |
| Product description | Date of Declaration | | Primary Article Identifier | | Candidate List Substance 1 | | CAS No. of substance 1 | |
| INSPECTION LAMP | 08-03-2024 | | 4052899630 | 1994 | Lead | 7 | 7439-92-1 | |

| Product description | Safe Use Instruction | Declaration No. in SCIP database |
|---------------------|--|--|
| INSPECTION LAMP | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 3ee5100c-84cd- 4784-ba6a- aabf9f12ebcb |

Product family datasheet

Legal advice

Application advice: For more detailed application information and graphics please see product datasheet and the user instruction.

*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.